

# ESSENZA - Ri-EVOLUTION

BINARI A VISTA - VISIBLE TRACK PROFILES - SICHTBARE LAUFSCHIENEN

**MY METALGLAS**


Configura il tuo sistema  
Configure your system  
Konfigurieren Sie Ihr System

Disponibile da  
Available from  
Verfügbar ab  
01/2021

| Sliding system                                                                               | V-5600                      | V-5650                      | V-5700                      |
|----------------------------------------------------------------------------------------------|-----------------------------|-----------------------------|-----------------------------|
| Max         | 120 kg                      | 80 kg                       | 120 kg                      |
| Soft-close  | 70-80-100-120 kg (optional) | 70-80-100-120 kg (optional) | 70-80-100-120 kg (optional) |

|                                                                                     |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |
| 8/10                                                                                | 8.76/10.76/12.76/13.52<br>con-with-mit V-5657                                       | 500 min<br>1000 max                                                                 |


**A soffitto**  
Ceiling  
Decke

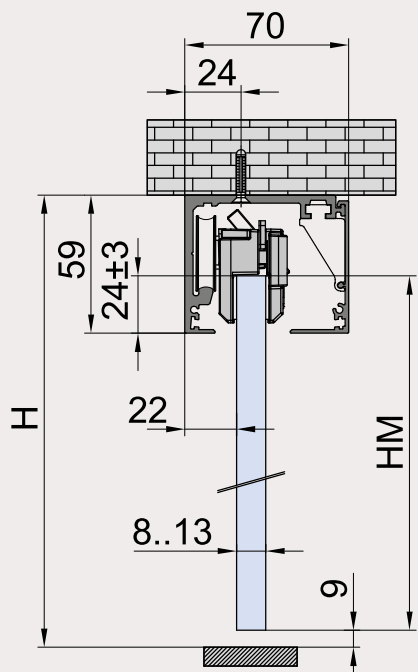

$$HM = H - 44$$


xme576a

**A parete**  
Wall  
Wand

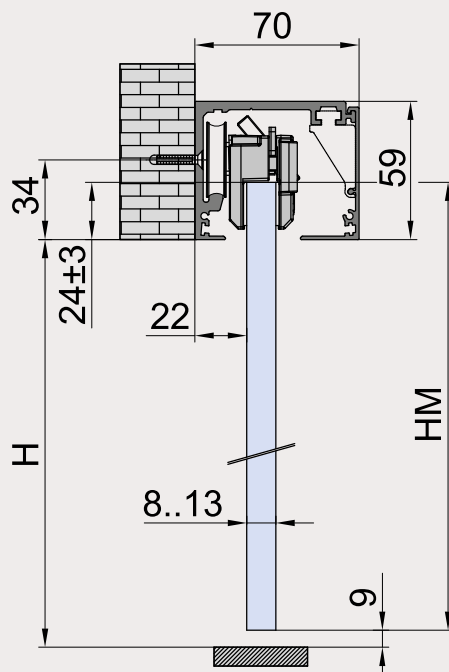


$$HM = H + 15$$

**Lavorazione vetro**  
Glass preparation  
Glasbearbeitung



- Fori optional
- Holes optional
- Bohrungen Optional


**SET 1**

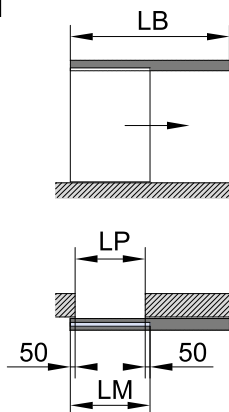

$$LB = LP \times 2 + 150$$

$$LM = LP + 100$$

**SET 2**

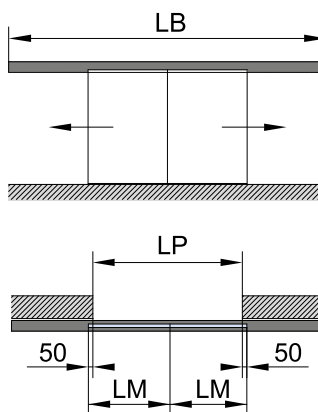

$$LB = LP \times 2 + 100$$

$$LM = (LP + 100) / 2$$

# ESSENZA - Ri-EVOLUTION

BINARI A VISTA - VISIBLE TRACK PROFILES - SICHTBARE LAUFSCHIENEN

MY METALGLAS


Configura il tuo sistema  
Configure your system  
Konfigurieren Sie Ihr System

Disponibile da  
Available from  
Verfügbar ab  
01/2021

| Sliding system | V-5603                      | V-5653                      | V-5703                      |
|----------------|-----------------------------|-----------------------------|-----------------------------|
| Max            | 120 kg                      | 80 kg                       | 120 kg                      |
| Soft-close     | 70-80-100-120 kg (optional) | 70-80-100-120 kg (optional) | 70-80-100-120 kg (optional) |

|      |                                               |                     |
|------|-----------------------------------------------|---------------------|
|      |                                               |                     |
| 8/10 | 8.76/10.76/12.76/13.52<br>con-with-mit V-5657 | 500 min<br>1000 max |

A soffitto  
Ceiling  
Decke

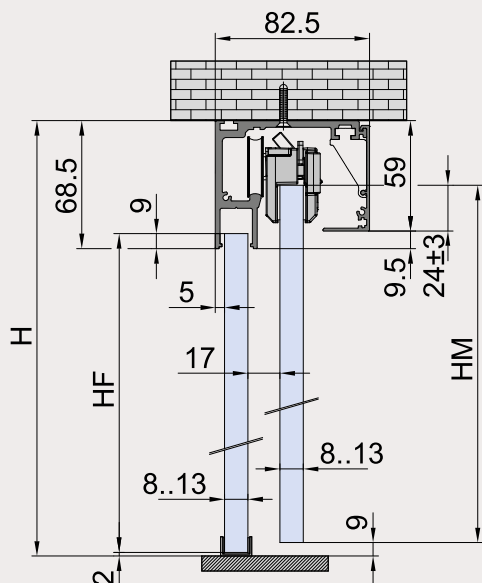


$$HM = H - 44$$

$$HF = H - 57,5$$

xme576c

A parete  
Wall  
Wand

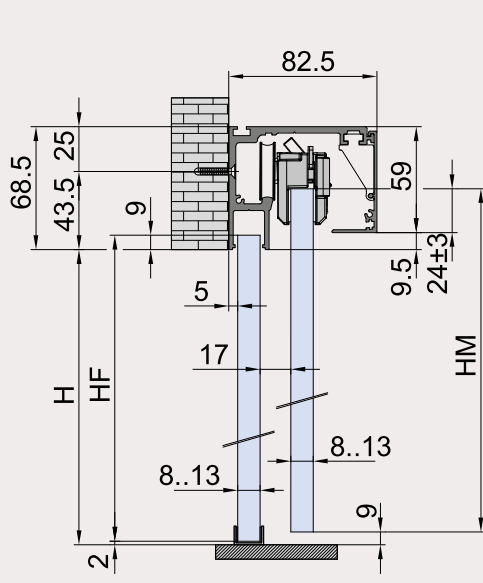


$$HM = H + 24,5$$

$$HF = H + 7$$

xme576b



Lavorazione vetro  
Glass preparation  
Glasbearbeitung



- Fori optional
- Holes optional
- Bohrungen Optional

| OPTIONAL                                                                                                                                                     |           |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| VP-019-MT                                                                                                                                                    | VP-018-MT |
|                                                                                                                                                              |           |
| 2                                                                                                                                                            | 3         |
| 1000 mm - 2000 mm - 3000 mm                                                                                                                                  |           |
| <ul style="list-style-type: none"> <li>• Guarnizioni per sede vetro fisso</li> <li>• Gaskets for fixed glass</li> <li>• Dichtungen für Seitenteil</li> </ul> |           |
|                                                                                                                                                              |           |
| 8                                                                                                                                                            | 10        |
|                                                                                                                                                              |           |
| 12                                                                                                                                                           |           |



SET 1



$$LB = LP + 100$$

$$LM/LF = (LP + 150) / 2$$

SET 2

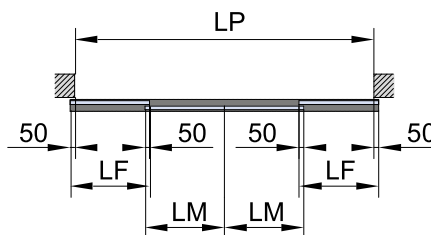

$$LB = LP + 100$$

$$LM/LF = (LP + 200) / 4$$

# ESSENZA - Ri-EVOLUTION

BINARI INVISIBILI - INVISIBLE TRACK PROFILES - UNSICHTBARE LAUFSCHIENEN

**MY METALGLAS**

Configura il tuo sistema  
Configure your system  
Konfigurieren Sie Ihr System

Disponibile da  
Available from  
Verfügbar ab  
01/2021

## Sliding system V-7600

Max 

120 kg

Soft-close 


70-80-100-120 kg (optional)

## + V-7605

(optional)

|                                                                                     |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |
| 8/10                                                                                | 8.76/10.76/12<br>12.76/13.52<br>con-with-mit V-5657                                 | 500 min<br>1000 max                                                                 |


**A soffitto**  
Ceiling  
Decke

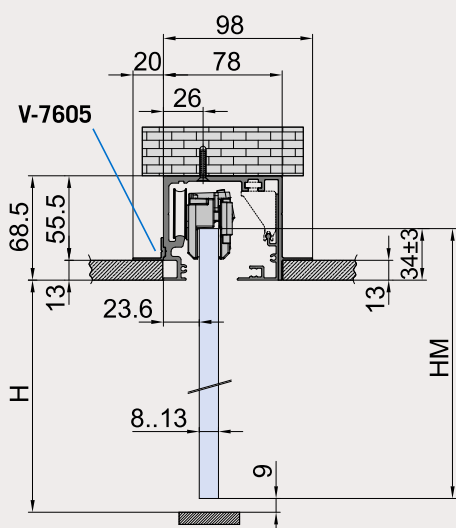

$$HM = H + 25$$


xme576f

**A parete**  
Wall  
Wand

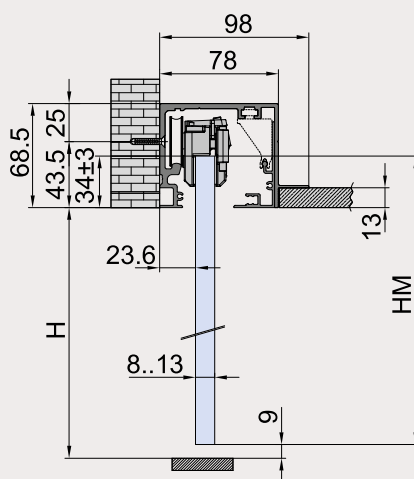



$$HM = H + 25$$

**Lavorazione vetro**  
Glass preparation  
Glasbearbeitung



- **Fori optional**
- **Holes optional**
- **Bohrungen Optional**



## SET 1



$$LB = LP \times 2 + 150$$

$$LM = LP + 100$$

## SET 2



$$LB = LP \times 2 + 100$$

$$LM = (LP + 100) / 2$$

# ESSENZA - Ri-EVOLUTION

BINARI INVISIBILI - INVISIBLE TRACK PROFILES - UNSICHTBARE LAUFSCHIENEN

MY METALGLAS

Configura il tuo sistema  
Configure your system  
Konfigurieren Sie Ihr System

Disponibile da  
Available from  
Verfügbar ab  
01/2021

## Sliding system V-7603

Max 

120 kg

Soft-close 


70-80-100-120 kg (optional)

## + V-7605

(optional)

|                                                                                     |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |
| 8/10                                                                                | 8.76/10.76/12<br>12.76/13.52<br>con-with-mit V-5657                                 | 500 min<br>1000 max                                                                 |

A soffitto  
Ceiling  
Decke

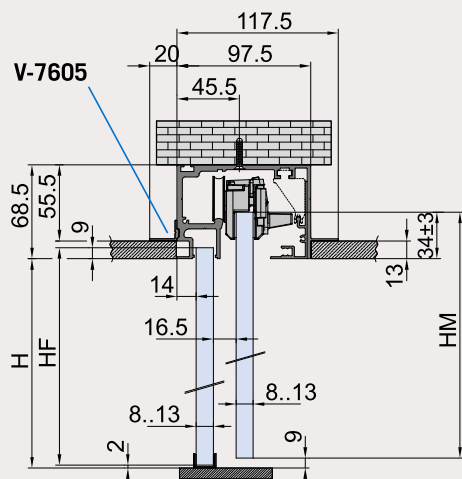


$$HM = H + 25$$

$$HF = H + 7$$

xme576g


A parete  
Wall  
Wand

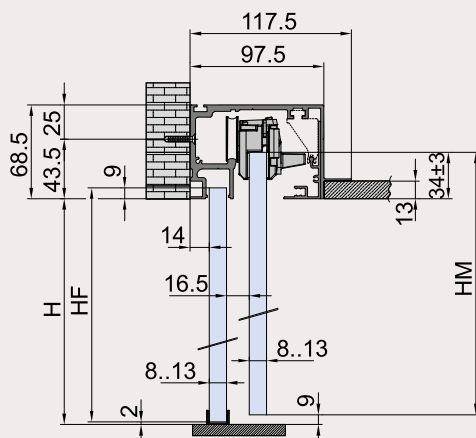

$$HM = H + 25$$

$$HF = H + 7$$



Lavorazione vetro  
Glass preparation  
Glasbearbeitung



- Fori optional
- Holes optional
- Bohrungen Optional

| OPTIONAL                                                                                                                                                     |                                                                                       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| VP-019-MT                                                                                                                                                    | VP-018-MT                                                                             |
|                                                                         |  |
| 2                                                                                                                                                            | 3                                                                                     |
| 1000 mm - 2000 mm - 3000 mm                                                                                                                                  |                                                                                       |
| <ul style="list-style-type: none"> <li>• Guarnizioni per sede vetro fisso</li> <li>• Gaskets for fixed glass</li> <li>• Dichtungen für Seitenteil</li> </ul> |                                                                                       |
|                                                                         |  |
| 8                                                                                                                                                            | 10                                                                                    |
|                                                                         |  |
| 12                                                                                                                                                           |                                                                                       |



## SET 1



$$LB = LP \times 2 + 150$$

$$LM = LP + 100$$

## SET 2

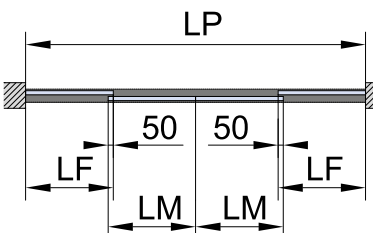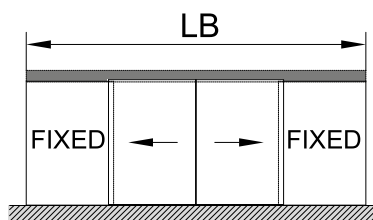

$$LB = LP \times 2 + 100$$

$$LM = (LP + 100) / 2$$

# ESSENZA - Ri-EVOLUTION

BINARI INVISIBILI - INVISIBLE TRACK PROFILES - UNSICHTBARE LAUFSCHIENEN

**MY METALGLAS**

Configura il tuo sistema  
Configure your system  
Konfigurieren Sie Ihr System

Disponibile da  
Available from  
Verfügbar ab  
01/2021

## Sliding system V-7650

Max 


120 kg

Soft-close 

70-80-100-120 kg (optional)

|                                                                                     |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |
| 8/10                                                                                | 8.76/10.76/12<br>12.76/13.52<br>con-with-mit V-5657                                 | 500 min<br>1000 max                                                                 |


A parete  
Wall  
Wand

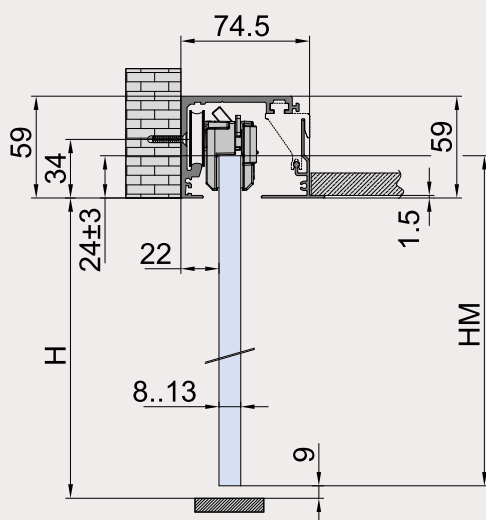

$$HM = H + 15$$



xme576e

Lavorazione vetro  
Glass preparation  
Glasbearbeitung



- Fori optional
- Holes optional
- Bohrungen Optional



## SET 1



$$LB = LP \times 2 + 150$$


$$LM = LP + 100$$

## SET 2





$$LB = LP \times 2 + 150$$

$$LM = (LP + 100) / 2$$




sincro

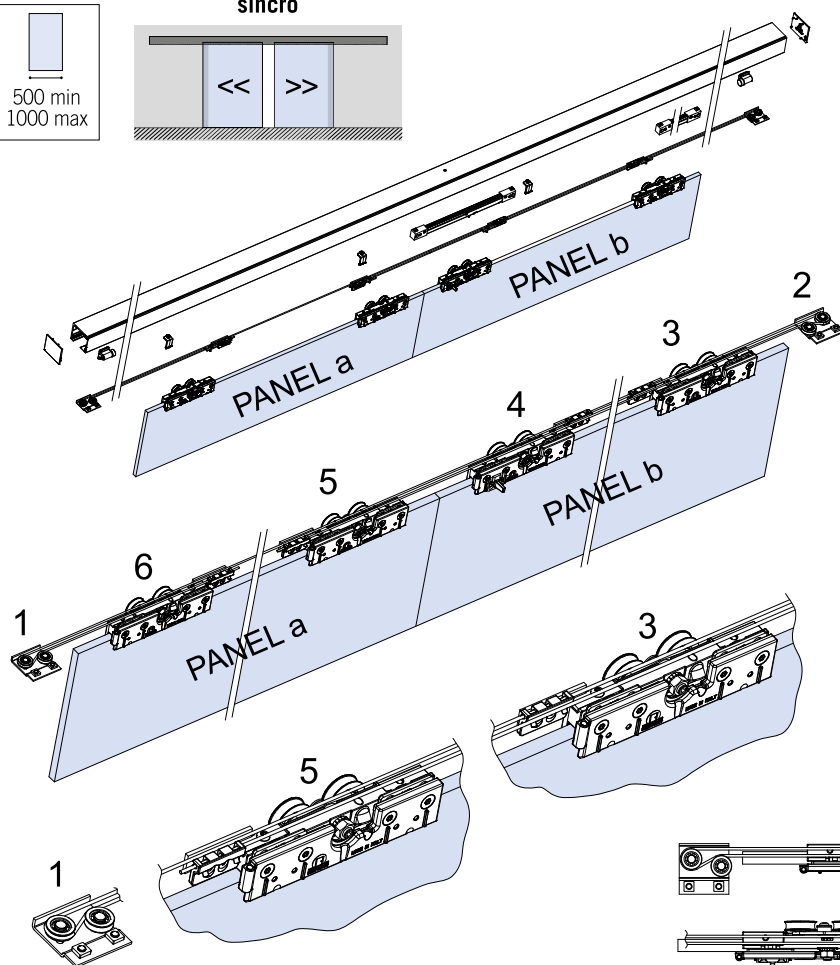


## V-5610



- Extra kit per apertura simultanea 2 ante. Disponibile per sistemi Ri-EVOLUTION
- Extra kit for 2 panels synchronously opening. Available for systems Ri-EVOLUTION
- Set für 2 Synchron öffnende Schiebeteile. Verfügbar für Systeme Ri-EVOLUTION

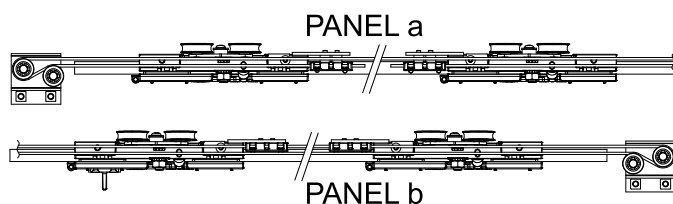

xme576m




self-closing

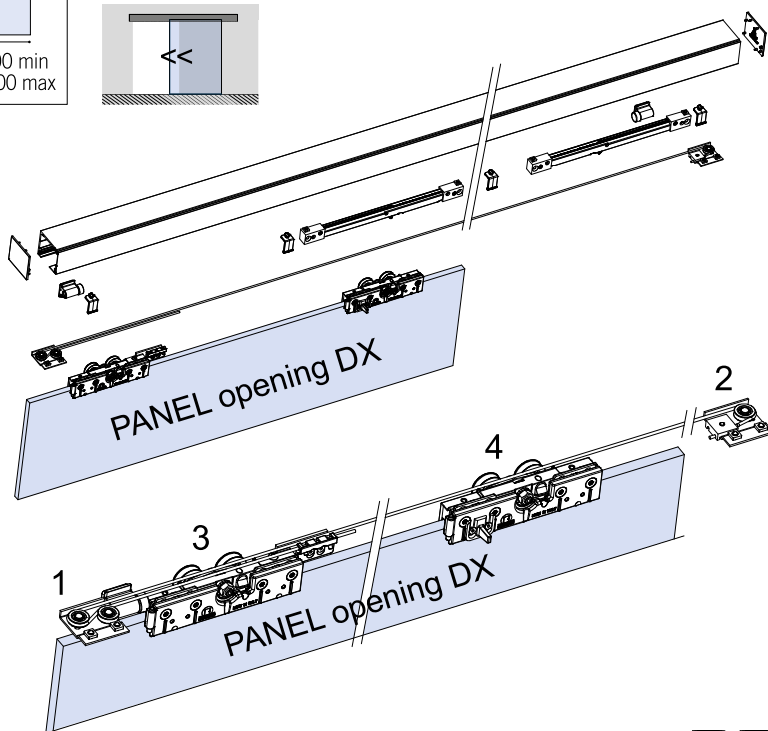


## V-5615

- Extra kit per autochiusura anta. Meccanismo integrato nel binario senza necessità di energia esterna. Disponibile per sistemi Ri-EVOLUTION
- Extra kit for panel self-closing. Mechanism integrated in the track profile requiring no external power supply. Available for systems Ri-EVOLUTION
- Set für selbstschließende Tür. System im Laufprofil unsichtbar und ohne Strombedarf. Verfügbar für Systeme Ri-EVOLUTION



### V-5615 DX


Apertura a destra  
Right opening  
Öffnung Rechts



### V-5615 SX

Apertura a sinistra  
Left opening  
Öffnung Links

<< self-closing




xme576n

## Sliding system V-1900

Max  100 kg  
Soft-close  70-100 kg (optional)

|                                                                                     |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |
| 8/10                                                                                | 8.76/10.76/12<br>12.76/13.5<br>con-with-mit V-1817                                  | 550 min<br>1000 max                                                                 |


### A soffitto Ceiling Decke

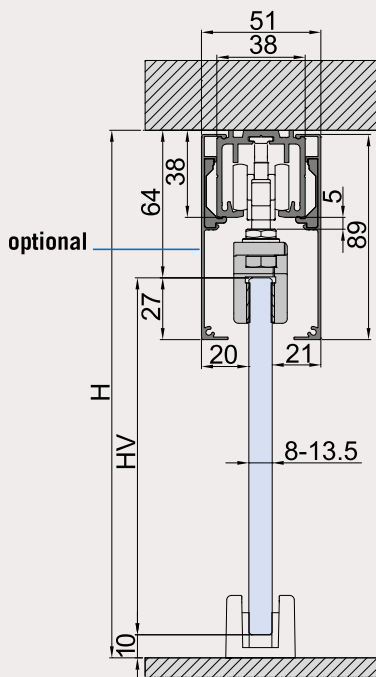

$$HV = H - 74$$


xme600g

### A parete Wall Wand

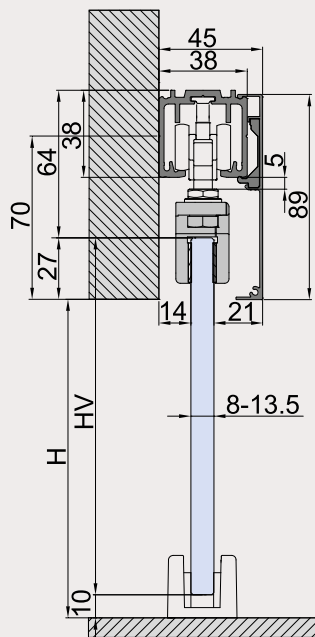

$$HV = H + 17$$

### Lavorazione vetro Glass preparation Glasbearbeitung



- Fori optional
- Holes optional
- Bohrungen Optional

#### V-1906-D70 SOFT-CLOSE

|                                                                                     |            |                                                       |
|-------------------------------------------------------------------------------------|------------|-------------------------------------------------------|
|  | Soft-close | Fori optional<br>Optional holes<br>Bohrungen optional |
|-------------------------------------------------------------------------------------|------------|-------------------------------------------------------|

|         |   |   |
|---------|---|---|
| min 700 | 1 | - |
| min 790 | 1 | ✓ |

#### V-1906-D100 SOFT-CLOSE

|                                                                                       |            |                                                       |
|---------------------------------------------------------------------------------------|------------|-------------------------------------------------------|
|  | Soft-close | Fori optional<br>Optional holes<br>Bohrungen optional |
|---------------------------------------------------------------------------------------|------------|-------------------------------------------------------|


|         |   |   |
|---------|---|---|
| min 700 | 1 | - |
| min 790 | 1 | ✓ |

#### V-1906-70 SOFT-CLOSE

|                                                                                       |            |                                                       |
|---------------------------------------------------------------------------------------|------------|-------------------------------------------------------|
|  | Soft-close | Fori optional<br>Optional holes<br>Bohrungen optional |
|---------------------------------------------------------------------------------------|------------|-------------------------------------------------------|

|         |   |   |
|---------|---|---|
| min 660 | 1 | - |
| min 750 | 1 | ✓ |


## SET 1

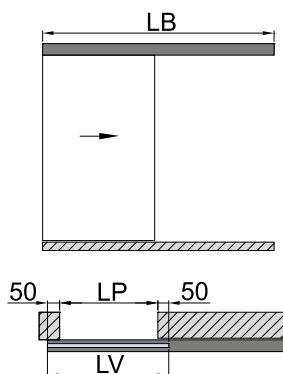

$$LB = LP \times 2 + 150$$

$$LV = LP + 100$$

## SET 2

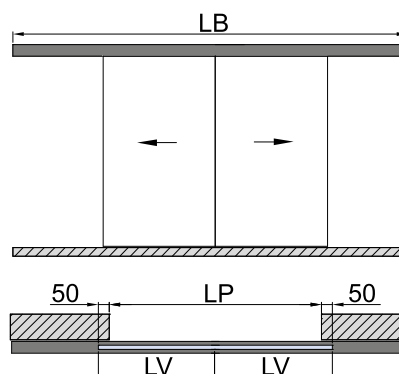

$$LB = LP \times 2 + 100$$


$$LV = (LP + 100) / 2$$

## Sliding system V-1903

Max  100 kg  
Soft-close  70-100 kg (optional)

|                                                                                     |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |
| 8/10                                                                                | 8.76/10.76/12<br>12.76/13.5<br>con-with-mit V-1817                                  | 550 min<br>1000 max                                                                 |

### A soffitto Ceiling Decke

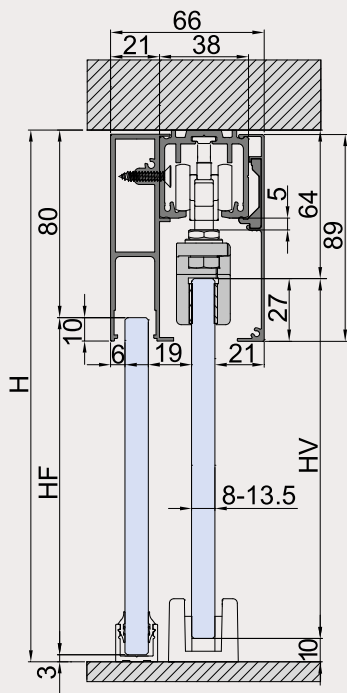


$$HV = H - 74$$

$$HF = H - 83$$

xme600h


### A parete Wall Wand

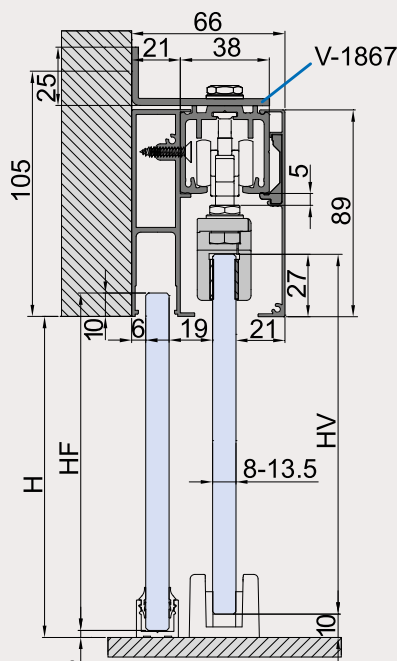

$$HV = H + 17$$

$$HF = H + 7$$

### Lavorazione vetro Glass preparation Glasbearbeitung



- Fori optional
- Holes optional
- Bohrungen Optional

#### V-1906-D70 SOFT-CLOSE

|                                                                                     |            |                                                       |
|-------------------------------------------------------------------------------------|------------|-------------------------------------------------------|
|  | Soft-close | Fori optional<br>Optional holes<br>Bohrungen optional |
|-------------------------------------------------------------------------------------|------------|-------------------------------------------------------|

|         |   |   |
|---------|---|---|
| min 700 | 1 | - |
| min 790 | 1 | ✓ |

#### V-1906-D100 SOFT-CLOSE

|                                                                                       |            |                                                       |
|---------------------------------------------------------------------------------------|------------|-------------------------------------------------------|
|  | Soft-close | Fori optional<br>Optional holes<br>Bohrungen optional |
|---------------------------------------------------------------------------------------|------------|-------------------------------------------------------|



|         |   |   |
|---------|---|---|
| min 700 | 1 | - |
| min 790 | 1 | ✓ |

#### V-1906-70 SOFT-CLOSE

|                                                                                       |            |                                                       |
|---------------------------------------------------------------------------------------|------------|-------------------------------------------------------|
|  | Soft-close | Fori optional<br>Optional holes<br>Bohrungen optional |
|---------------------------------------------------------------------------------------|------------|-------------------------------------------------------|

|         |   |   |
|---------|---|---|
| min 660 | 1 | - |
| min 750 | 1 | ✓ |



## SET 1

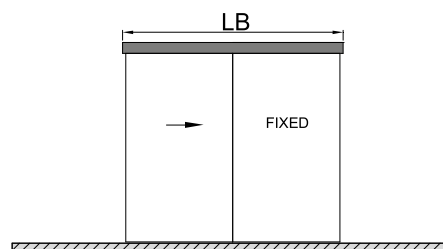

$$LB = LP$$

$$LV = LF = (LP + 50) / 2$$

## SET 2

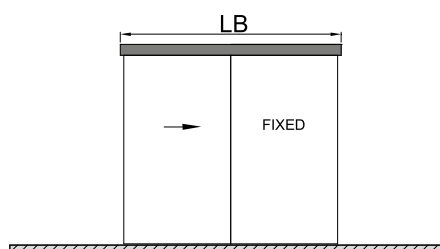


$$LB = LP + 100$$

$$LV = LF = (LP + 150) / 2$$


### OPTIONAL

#### VP-019-MT



1000 mm - 2000 mm - 3000 mm

#### VP-018-MT



- Guarnizioni per sede vetro fisso
- Gaskets for fixed glass
- Dichtungen für Seitenteil

